

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

Attorney Docket No.: 106327

Date: June 1, 2000

BOX PATENT APPLICATION

NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): IMAGE CORRECTION APPARATUS AND RECORDING MEDIUM HAVING IMAGE
CORRECTION PROGRAM

By (Inventors): Juping YANG and Yukio NAKAGAWA

- ☒ Formal drawings (Figs. 1-6B; 6 sheets) are attached.
☒ A Declaration and Power of Attorney is filed herewith.
☒ An assignment of the invention to Nikon Corporation is filed herewith.
☐ An Information Disclosure Statement is filed herewith.
☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.
☐ A Preliminary Amendment is filed herewith.
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____.--
☒ Priority of foreign application(s) No. 11-157165 filed June 3, 1999 in Japan is claimed (35 U.S.C. §119).
☒ A certified copy of the above corresponding foreign application(s) is filed herewith.
☒ The filing fee is calculated below:

CLAIMS IN THE APPLICATION AFTER ENTRY OF
ANY PRELIMINARY AMENDMENT NOTED ABOVE

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	14 - 20	= 0
INDEP CLAIMS	5 - 3	= 2*
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

* If the difference is less than zero, enter "0".

SMALL ENTITY

RATE	FEE
	\$ 345
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

OR

OR

OR

OR

OR

OR

OTHER THAN A
SMALL ENTITY

RATE	FEE
	\$ 690
x 18	\$
x 78	\$156
+260	\$
TOTAL	\$846

- ☒ Check No. 108997 in the amount of \$846 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,



James A. Oliff
Registration No. 27,075

JAO:TJP/crt

Thomas J. Pardini
Registration No. 30,411

Date: June 1, 2000

Total Drawing Sheets:: 6
Docket Number:: 106327

Continuity Information

>This application is a::
Application One::
Filing Date::
Patent Number::
which is a::
>>Application Two::
Filing Date::
Patent Number::

Prior Foreign Applications

Foreign Application One:: 11-157165
Filing Date:: JUNE 3, 1999
Country:: JAPAN
Priority Claimed:: YES
Foreign Application Two::
Filing Date::
Country::
Priority Claimed::
Foreign Application Three::
Filing Date::
Country::
Priority Claimed::

IMAGE CORRECTION APPARATUS AND
RECORDING MEDIUM HAVING IMAGE CORRECTION PROGRAM

INCORPORATION BY REFERENCE

5 The disclosure of the following priority application
is herein incorporated by reference:

Japanese Patent Application No. 11-157165 filed June 3,
1999

10 BACKGROUND OF THE INVENTION

1. Field of the Invention

15 The present invention relates to a color fog
correction apparatus that corrects a color fog manifesting
over, for instance, a photographic image that has become
discolored after having been printed onto photographic
printing paper or after having been stored over a long
period of time on film, a photographic image obtained
through a photographing operation performed under
undesirable illumination conditions or exposure conditions
and the like, and it also relates to a machine-readable
recording medium having an image color fog correction
program recorded therein.

2. Description of the Related Art

25 A color fog may occur in a photographic image
obtained through an image-capturing operation performed

with a camera due to undesirable illumination conditions,
incorrect exposure conditions or the like. A color fog
may also occur when a photographic image printed on
photographic printing paper has become discolored. Such a
5 color fog may adversely affect the color tone of the
photographic image, causing it to turn reddish or greenish.
The undesirable phenomena regarding color of a
photographic image described above are referred to as
"color fog" in this specification.

10 A color-fogged image is corrected, for instance, by
estimating the spectrum of the illuminating light and
applying to the image a filter of a color that is
complementary to the color of the illuminating light, by
exposing the three colors separately over different
15 lengths of time when printing the image onto photographic
printing paper and thus adjusting the degrees of color
development to achieve color correction or by performing
exposure correction to adjust the volumes of data
corresponding to the three colors during digital
20 processing to achieve color correction in the prior art.

However, there is a problem with the method of color
correction in the prior art achieved by estimating the
color of the illuminating light and applying a filter to
the image of a color that is complementary to the color of
25 the illuminating light in that it is difficult to

from outside constituted of a plurality of pixels each having a value in a color component among a plurality of color components; an average value calculation unit that calculates average values of color component values
5 corresponding to individual color components in the image data; and a correction unit that corrects the color component values of individual pixels to match the average values of the color component values corresponding to individual color components with at least one specific
10 reference value.

In this image correction apparatus, it is preferred that the correction unit uses one common reference value for the plurality of color components as the reference value. In this case, it is preferred that the correction
15 unit sets a value achieved by further averaging the average values of the color component values corresponding to individual color components as the common reference value. Or, it is preferred that the correction unit sets a maximum value among the average values of the color
20 component values corresponding to individual color components as the common reference value.

Also, it is preferred that the image correction apparatus further comprises a stage value calculation unit that determines three or more stage values between the
25 average value of the color component values and a

specified reference value for each of the plurality of color components, a number of stage values being identical to each other among the plurality of color components, and

the correction unit respectively sets stage values

5 having an common order number among the plurality of color components as reference values for the plurality of color components and corrects color component values of individual pixels to match the average values of the color component values corresponding to individual color components with the reference values set for the individual color components.

Also, it is preferred that the correction unit fixes a maximum value and a minimum value of the color component values corresponding to individual color components not to be corrected and corrects color component values between the maximum value and the minimum value by using a specific function.

Another image correction apparatus according to the present invention comprises: an image obtaining unit that obtains image data from outside constituted of a plurality of pixels each having a value in a color component among a plurality of color components; a histogram preparation unit that prepares a histogram for each of the color components using the image data; an average value calculation unit that calculates an average value of the

histogram; and a histogram conversion unit that creates new image data by converting the histogram so that an average value of a histogram resulting from the conversion matches a specified reference value.

5 An image correction apparatus according to the present invention comprises: an image obtaining unit that obtains image data from outside constituted of a plurality of pixels each having a value in a color component among a plurality of color components; a histogram preparation
10 unit that prepares a histogram for each of the color components using the image data; an average value calculation unit that calculates an average value of the histogram; and a stage value calculation unit that sets at least three stage values between each of the averages
15 value and a specified reference value; and a histogram conversion unit that converts the histogram so that an average value of a histogram resulting from the conversion matches a stage value having a common order number among the plurality of the color components.

20 In the above image correction apparatuses, it is preferred that the average value corresponds to a barycentric value of the histogram.

 Also, it is preferred that the histogram conversion unit converts the histogram by using an interpolation
25 function.

0554268 060100

A recording medium according to the present invention records a control program used in an image correction apparatus. The control program comprises: an instruction for obtaining image data from outside constituted of a plurality of pixels each having a value of a color component among a plurality of color components; an instruction for calculating average values of color component values each corresponding to one of the color components using the image data; and an instruction for correcting the color component values of the pixels to match the average values of the color component values with a specific reference value.

A data signal according to the present invention embodied in a carrier wave comprises a control program used in an image correction apparatus. The control program comprises: an instruction for obtaining image data from outside constituted of a plurality of pixels each having a value of a color component among a plurality of color components; an instruction for calculating average values of color component values each corresponding to one of the color components using the image data; and an instruction for correcting the color component values of the pixels to match the average values of the color component values with a specific reference value.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a flowchart of the operation performed in the essential portion of the image correction apparatus in the embodiment 1 of the present invention;

5 FIG. 2 is a flowchart of the operation performed in the essential portion of the image correction apparatus in the embodiment 2 of the present invention;

10 FIG. 3 is a flowchart of the operation performed in the essential portion of the image correction apparatus in the example 1 of the present invention;

FIG. 4 is a flowchart of the operation performed in the essential portion of the image correction apparatus in example 2 of the present invention;

15 FIG. 5 is the schematic block diagram of the hardware configuration of the present invention; and

FIGS. 6A and 6B present interpolation functions that may be used in the histogram conversion.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 (Embodiment 1)

The overall structure of the image correction apparatus in this embodiment of the present invention that employs a computer is shown in FIG. 5.

In FIG. 5, a computer 1 is provided with a CPU
25 (microprocessor) 2. An input device 3 constituted of a

5 An external apparatus 11 such as an external recording
medium is connected to the interface board 10. A CD-ROM
drive device 12 is connected to the CPU 2, and a CD-ROM 13
for recording an image correction program and an
installation program to install the color correction
10 program is inserted at the CD-ROM drive device 12.

Using the installation program in the CD-ROM 13, the CPU 2 expands the image color fog correction program in the CD-ROM 13 and stores it in an execution-enabled state at the hard disk 6.

15 The image color fog correction apparatus in this
embodiment is achieved based upon a hypothesis that the
average color of an object is, by nature, gray. Namely,
when illuminating light of a multiple component spectrum
is irradiated on an object and the spectral reflectances
20 over the entire surface of the subject are averaged, the
average spectral reflectance achieves a flat distribution
with respect to wavelength. Thus, we tend to perceive the
averaged color of the entire surface of the object as the
color of the illuminating light.

25 Based upon this hypothesis, we made the following

inference. The averaged color of an object irradiated by illuminating light with a completely flat spectrum must have a flat spectrum as well. Assuming that the color of an object, i.e. the color of its image, with a flat spectrum on average irradiated by illuminating light with a completely flat spectrum is the most pleasing to the human eye, if an overall average color of the image is a color of gray corresponding to a flat spectrum, the color of the image is equivalent to a color of an image irradiated by a light source having a flat spectrum and, therefore, should be a pleasing color tone. In other words, if the overall average color of the image is not gray, correction should be implemented to adjust the overall average color to gray, which corresponds to a flat spectrum, i.e., to equalize the individual average values of the histograms corresponding to the individual color components so that any undesirable effect of illuminating light with a non-flat spectrum or any undesirable effect of incorrect exposure or discoloration can be removed from the image. We reached the above observation through a concentrated effort in research, and this embodiment is implemented based upon the concept outlined above.

FIG. 1 is a flowchart of the operation achieved in the image color fog correction apparatus in the embodiment 1 of the present invention. The following is an

explanation of the image correction operation, given in reference to the step numbers in FIG. 1.

First, when the user starts up the image color fog correction program, the CPU2 opens an image file to
5 undergo the correction and obtains the image data (S1).

Next, histograms corresponding to the individual color components, i.e., the R, G and B color components, are prepared using the image data (S21, S22 and S23).

Then, histogram average values R_{ave} , G_{ave} and B_{ave}
10 corresponding to the individual color components R, G and B are calculated (S31, S32 and S33). Before proceeding to the next phase, the user specifies a reference value W_0 (S2). The specific method of W_0 specification is to be detailed later.

During the next phase, the individual histograms
15 obtained in steps S21, S22 and S23 are converted so that the individual converted histogram average values match the reference value W_0 (S41, S42 and S43). The details of the conversion method are to be given later. The image
20 obtained at this time point is designated as a corrected image, and the image is updated (S5).

Since the individual histogram average values corresponding to the color components R, G and B each match the reference value W_0 in the image that has been
25 corrected as described above, a pleasing color tone that

is equivalent to the color tone of an image illuminated with flat illuminating light is achieved.

The individual histogram average values R_{ave} , G_{ave} and B_{ave} corresponding to the color components R, G and B of the image in embodiment 1 explained above are calculated as follows.

$$\begin{aligned} R_{ave} &= \sum F_R(x) \cdot P_R(x) \\ G_{ave} &= \sum F_G(x) \cdot P_G(x) \\ B_{ave} &= \sum F_B(x) \cdot P_B(x) \end{aligned} \quad \text{expression 1}$$

In the mathematical expressions above, x represents the brightness level of the image and is normally equivalent to 8-bit data having a minimum value of 0 and a maximum value of 255, and \sum represents addition of values regarding 0 of x through 255 of x .

$P_R(x)$, $P_G(x)$ and $P_B(x)$ each represents the ratio of the number of pixels at the brightness level x to the entire number of pixels in the corresponding color component R, G or B in the image.

$F_R(x)$, $F_G(x)$ and $F_B(x)$ are each an arbitrary function of x . These functions may each be expressed as x , x^2 , $(x - x_w)^2$ or the like. x_w represents the barycenter of a given histogram, and is equivalent to W_R , W_G and W_B to be detailed later. Of these functions,

$$F_R(x) = F_G(x) = F_B(x) = x \quad \text{expression 2}$$

is particularly desirable, and when it is used, the

individual average values R_{ave} , G_{ave} and B_{ave} respectively match the barycentric values W_R , W_G and W_B of the corresponding histograms to validate relationships expressed as $R_{ave} = W_R$, $G_{ave} = W_G$ and $B_{ave} = W_B$.

5 In addition, in embodiment 1, the reference value W_0 should preferably assume the average value of the average values of the histograms corresponding to the individual color components, i.e., $W_0 = (R_{ave} + G_{ave} + B_{ave})/3$ or the maximum value among the average values of the histograms
10 corresponding to the individual color components, i.e., $W_0 = \max (R_{ave}, G_{ave}, B_{ave})$.

 If the average value is used, an advantage is achieved in that an image faithful to the original is achieved through correction, whereas an advantage is
15 achieved in that a dark original image is brightened through the correction when the maximum value is used.

 In embodiment 1, the conversion for equalizing the average values of the histograms corresponding to the individual color components to a specified value S (the
20 specified value S is equivalent to the reference value in embodiment 1 and equivalent to a k th level value in embodiment 2 which is to be detailed later) is achieved by using an interpolation function. An interpolation function represented by a polygonal line (FIG. 6A) or a
25 curve (FIG. 6B) shown in FIG. 6A or 6B may be used for the

conversion. It is desirable to use a curve, e.g., a quadratic function that achieves simplicity and convenience, to smoothly convert gradation levels. While FIGS. 6A and 6B present histograms of the color component R, the other color components are represented in a similar manner. In FIGS. 6A and 6B, x_{\min} , x_{\max} and R_{ave} respectively represent the minimum value, the maximum value and the average value of the brightness levels before the conversion.

Furthermore, in embodiment 1, a reference value may be specified in S2 by setting it in advance, or it may be input by the user each time.

Embodiment 1 is explained in further detail in reference to the flowchart in FIG. 3.

First, when the user starts up the image color fog correction program, the CPU 2 opens the image file to undergo the correction and obtains the image data (S1).

Next, the number of pixels at each brightness level in the image is calculated for each color component (S211, S212 and S213).

Then, the ratios $P_R(x)$, $P_G(x)$ and $P_B(x)$ each representing the ratio of the number of pixels at each brightness level in the image to the entire number of pixels are calculated for the individual color components to obtain corresponding histograms (S221, S222 and S223).

In other words, obtaining (preparing) a histogram means ascertaining the ratio of the number of pixels at each brightness level to the entire number of pixels. It is to be noted that the number of pixels at each brightness level may be ascertained instead.

Next, the average values are calculated using expressions 1 and 2 during the phase that includes S31, S32 and S33. The average values R_{ave} , G_{ave} and B_{ave} of the individual histograms thus obtained constitute the barycentric values of the histograms and from this point onward they are referred to as W_R , W_G and W_B .

The reference value W_0 is specified before proceeding to the next phase (S2).

Next, the histograms obtained in S221, S222 and S223 are converted so that the barycentric values of the converted histograms match the reference value W_0 specified in S2.

More specifically, the conversion is implemented as follows.

While the conversion is implemented by using a quadratic function in this implementation, another function may be used instead. The quadratic function $f(x)$ is defined as;

$$f(x) = ax^2 + bx + c \quad \text{expression 3}$$

with a , b and c each representing a constant.

the conversion, each brightness level in the new histogram resulting from the conversion is calculated by using $f(x)$. During this process, the pixel number ratio at the brightness level x is converted to a pixel number ratio corresponding to the brightness level $f(x)$. The histogram is converted through this processing (S421).

In other words, during a histogram conversion, the values at individual levels between the maximum value and the minimum value are corrected using a specific function while leaving the maximum value and the minimum value of the level on the horizontal axis in the histogram undergoing the conversion unchanged. In the example shown in FIG. 6B, the brightness level 0 and the brightness level 255 remain unchanged, and the intermediate level, i.e., the brightness level 128, is corrected to a slightly larger value, e.g., to approximately the brightness level 180. If there are 100 pixels at the brightness level 128 before the histogram conversion, there will be approximately 100 pixels at the brightness level 180 after the histogram conversion although there may be an error in quantization. To rephrase this, a histogram conversion is achieved by shifting the histogram to the right or left while slightly changing the shape of the histogram with the maximum value and the minimum value of the level on the horizontal axis of the histogram fixed.

The processing described above is also performed in parallel on the histogram of the color component G and the histogram of the color component B, to convert the individual histograms (S422 and S423).

5 After the histograms corresponding to R, G and B are converted in this manner, barycentric values W_R , W_G and W_B are calculated for the converted histograms as in the processing performed in S31, S32 and S33 (S431, S432 and S433).

10 Next, a decision is made as to whether not the barycentric values W_R , W_G and W_B are each equal to W_0 (S441, S442 and S443).

 If they are equal to W_0 (YES), the operation proceeds to the next phase.

15 If a negative decision is made (NO), on the other hand, the operation returns to S411, S421 or S431 to repeat the loop described above until all the barycentric values are equalized to W_0 by further converting the converted histogram.

20 When an affirmative decision (YES) is made in all S414, S424 and S434, the image is updated (S5) before ending the processing.

(Embodiment 2)

 Since the structure of the correction apparatus in
25 embodiment 2 is identical to that assumed in embodiment 1,

its explanation is omitted.

In the image color fog correction, the gray color hypothesis is valid as in embodiment 1. However, when the hypothesis that the most pleasing image is achieved when the illuminating light has a flat spectrum and is a prerequisite of embodiment 1 is not valid, i.e., when the subject is illuminated under illumination conditions manifesting a unique color tone, the apparatus in this embodiment corrects a color fog. In this situation, the average color of the image is not gray. For instance, an image of Mount Fuji at sunset or a landscape image photographed under water may be corrected through embodiment 2. In the former case, the illuminating light is bound to be reddish even though the average reflectance of Mount Fuji, which is the subject, may manifest a flat spectrum. In other words, it is the reddish illuminating light that we hold in memory as a lasting impression. Under these circumstances, it is not desirable to implement the correction method in embodiment 1, since the impression of the original scene becomes lost. In embodiment 2, a color fog is corrected by taking into consideration such unique characteristics of a particular illuminating light.

FIG. 2 is a flowchart of the operation achieved in the image color fog correction apparatus in embodiment 2

of the present invention.

The following is an explanation of the image correction operation, given in reference to the step numbers in FIG. 2.

5 First, when the user starts up the image color fog correction program, the CPU 2 opens an image file to undergo the correction and obtains the image data (S1).

10 Next, histograms corresponding to the individual color components, i.e., the R, G and B color components, are prepared using the image data (S21, S22 and S23).

Then, histogram average values R_{ave} , G_{ave} and B_{ave} corresponding to the individual color components R, G and B are calculated (S31, S32 and S33).

15 Before proceeding to the next phase, the user specifies a reference value W_0 (S2).

During the next phase, differences $|W_0 - R_{ave}|$, $|W_0 - G_{ave}|$ and $|W_0 - B_{ave}|$ between the reference value W_0 and the individual average values calculated during the preceding phase are calculated (S41, S42 and S43).

20 Before proceeding to the next phase, the user specifies the number of stages k ($k \geq 3$) to be set between the individual average values (R_{ave} , G_{ave} , B_{ave}) and W_0 (S3).

During the next phase, k stage values are sequentially calculated between each of the average values
25 (R_{ave} , G_{ave} , B_{ave}) and W_0 (S51, S52 and S53). At this point,

the individual first stage values are designated as average values, and the individual kth stage values are each designated as a common reference value W_0 for the corresponding color components.

5 Next, the individual histograms are converted so that the average values of the converted histograms match the corresponding kth stage values (S61, S62 and S63).

10 Next, the image is updated (S7). In the next step, an evaluation is performed to determine whether not the color of the image is good (S8). If an affirmative decision is made (YES / good color), the processing ends.

15 If a negative decision is made (NO / poor color), the value of k is reduced by one (S9). Next, a decision is made as to whether or not the reduced value of k is equal to 1 (S10). Since a negative decision (NO / $k \neq 1$) is invariably made in the first loop, the operation returns to the phase that includes S61, S62 and S63 to convert the individual histograms so that the average values of the converted histograms become equal to the kth stage values
20 after k is decremented by one and then the image is updated in S7 before making a decision in S8 as to whether or not the color is good.

25 If an affirmative decision is made (YES / good color) in S8, the processing ends. If a negative decision is made (NO / poor color), the operation proceeds to S10 via

S9 to make a decision as to whether or not $k = 1$ is true.
If a negative decision is made (NO / $k \neq 1$), the operation returns to the phase that includes S61, S62 and S63 to engage in the operation explained above.

5 If, on the other hand, an affirmative decision is made (YES / $k = 1$), it means that the current stage value corresponds to the average value of the histogram of the original image, and the operation shifts to one of the three processing phases described below.

10 In the first processing phase, at least either the reference value W_0 set in S2 or the number of stages k set in S3 is changed before performing the processing in FIG. 2 again.

15 In the second processing phase, the processing ends without updating the image.

 In the third processing phase, the operation shifts to a processing phase not shown in the flowchart in FIG. 2.

 In this embodiment, the number of stages may be specified in S3 by setting it in advance or it may be
20 input by the user each time.

 In addition, the k stage values assumed between each of the average values (R_{ave} , G_{ave} , B_{ave}) and W_0 should be preferably set over equal intervals.

 In embodiment 2, and the individual average values R_{ave} ,
25 G_{ave} and B_{ave} of the histograms corresponding to the color

The reference value W_0 is specified before proceeding to the next phase (S2).

At the next phase, differences $|W_0 - W_R|$, $|W_0 - W_G|$ and $|W_0 - W_B|$ between the reference value W_0 and the individual barycentric values calculated during the preceding phase are calculated (S41, S42 and S43).

Before proceeding to the next phase, the user specifies the number of stages k ($k \geq 3$) to be set between the individual barycentric values (W_R , W_G , W_B) and W_0 (S3).

During the next phase, k stage values W_{KR} , W_{KG} and W_{KB} are sequentially calculated between each of the barycentric values (W_R , W_G , W_B) and W_0 (S51, S52 and S53). At this point, the individual first stage values are designated as barycentric values and the individual k th stage values are designated as reference values W_0 for the corresponding color components.

Next, the individual histograms are converted so that of the barycentric values of the converted histograms match the corresponding k th stage values (W_{KR} , W_{KG} and W_{KB}).

More specifically, the conversion is implemented as follows.

While the conversion is implemented by using a quadratic function in this implementation, another function may be used instead. The quadratic function $f(x)$ is defined as;

$$f(x) = ax^2 + bx + c \quad \text{expression 7}$$

with a, b and c each representing a constant.

The histogram of the color component R is now undergoing the conversion, with the minimum value, the maximum value and the barycentric value of the brightness levels respectively set to 0, 255 and W_R .

These values are then incorporated through substitution in expression 7, and $f(x)$ is set to 0, 255 and W_{KR} respectively in correspondence to 0, 255 and W_R assumed for x. As a result, the relationships expressed as;

$$f(0) = c = 0 \quad \text{expression 8}$$

$$f(255) = a \times 255^2 + b \times 255 + c = 255 \quad \text{expression 9 and}$$

$$f(W_R) = aW_R^2 + bW_R + c = W_{KR} \quad \text{expression 10 are achieved.}$$

a, b and c are ascertained by solving the tertiary linear equations (three unknowns) above, i.e., expressions 8, 9 and 10, to determine the function form of $f(x)$ (S611).

The processing described above is also performed on the histogram of the color component G and the histogram of the color component B undergoing the conversion in parallel, independently of each other, and thus, the function forms of $f(x)$ are independently determined in correspondence to the individual histograms (S612 and S613).

Next, using the $f(x)$ thus determined, the histogram

barycentric values are equalized to W_{KR} , W_{KG} and W_{KB} respectively through further conversion.

When an affirmative decision (YES) is made in all S641, S642 and S643, the image is updated (S7). In the
5 next step, an evaluation is performed to determine whether or not the color of the image is good (S8). If an affirmative decision is made (YES / good color), the processing ends.

If a negative decision is made (NO / poor color), the
10 value of k is reduced by one (S9). Next, a decision is made as to whether or not the reduced value of k is equal to 1 (S10).

Since a negative decision (NO / $k \neq 1$) is invariably made in the first loop, the operation returns to the phase
15 that includes S611, S612 and S613 to determine the function forms of $f(x)$ for the individual color components corresponding to the k th stage values after k is decremented by 1 and the operation proceeds through the phase that includes S621, S622 and S623, the phase that
20 includes S631, S632 and S633 and the phase that includes S641, S642 and S643 before the image is updated in S7 and a decision is made as to whether or not the color is good in S8.

If an affirmative decision is made (YES / good color)
25 in S8, the processing ends. If a negative decision is

made (NO / poor color), the operation proceeds to S10 via S9 to make a decision as to whether or not $k = 1$ is true.

If a negative decision is made (NO / $k \neq 1$), the operation returns to the phase that includes S611, S612

5 and S613 to engage in the operation explained above.

If, on the other hand, an affirmative decision is made (YES / $k = 1$), it means that the current stage value corresponds to the average value of the histogram of the original image, and the operation shifts to one of the
10 three processing phases described below.

In the first processing phase, at least either the reference value W_0 set in S2 or the number of stages of k set in S3 is changed before performing the processing in FIG. 4 again.

15 In the second processing phase, the processing ends without updating the image.

In the third processing phase, the operation shifts to a processing phase not shown in the flowchart in FIG. 2.

As explained above, in embodiment 1 of the present
20 invention, an image is corrected to achieve a color tone equivalent to the color tone of an image when the natural color of the object is gray and the illuminating light is flat. In embodiment 2, the barycentric values of the histograms can be converted with a high degree of

25 flexibility to achieve an image correction in a desirable

transmitted. A computer 1 in FIG. 5 is provided with a communication interface 21 connected to a communication line 22. A computer 23 is a server that provides the image correction program in which the image correction program is stored. The communication line 22 may be a communication line for Internet connection or a communication line for a personal computer, or it may be a dedicated communication line. The communication line 22 may be a telephone line or a wireless telephone line such as a mobile telephone line.

What is claimed is;

1. An image correction apparatus comprising:

an image obtaining unit that obtains image data from outside constituted of a plurality of pixels each having a value in a color component among a plurality of color components;

an average value calculation unit that calculates average values of color component values corresponding to individual color components in said image data; and

a correction unit that corrects the color component values of individual pixels to match the average values of the color component values corresponding to individual color components with at least one specific reference value.

2. An image correction apparatus according to claim 1, wherein:

said correction unit uses one common reference value for said plurality of color components as said reference value.

3. An image correction apparatus according to claim 1, further comprising:

a stage value calculation unit that determines three or more stage values between the average value of the

color component values and a specified reference value for each of said plurality of color components, a number of stage values being identical to each other among said plurality of color components, wherein:

5 said correction unit respectively sets stage values having an common order number among said plurality of color components as reference values for said plurality of color components and corrects color component values of individual pixels to match the average values of the color
10 component values corresponding to individual color components with said reference values set for the individual color components.

4. An image correction apparatus according to claim 1,
15 wherein:

 said correction unit fixes a maximum value and a minimum value of the color component values corresponding to individual color components not to be corrected and corrects color component values between the maximum value
20 and the minimum value by using a specific function.

5. An image correction apparatus according to claim 2, wherein:

 said correction unit sets a value achieved by further
25 averaging said average values of the color component

values corresponding to individual color components as said common reference value.

6. An image correction apparatus according to claim 2,

wherein:

said correction unit sets a maximum value among said average values of the color component values corresponding to individual color components as said common reference value.

7. An image correction apparatus comprising:

an image obtaining unit that obtains image data from outside constituted of a plurality of pixels each having a value in a color component among a plurality of color

components;

a histogram preparation unit that prepares a histogram for each of said color components using said image data;

an average value calculation unit that calculates an average value of the histogram; and

a histogram conversion unit that creates new image data by converting the histogram so that an average value of a histogram resulting from the conversion matches a specified reference value.

8. An image correction apparatus comprising:

an image obtaining unit that obtains image data from outside constituted of a plurality of pixels each having a value in a color component among a plurality of color

5 components;

a histogram preparation unit that prepares a histogram for each of said color components using said image data;

10 an average value calculation unit that calculates an average value of the histogram; and

a stage value calculation unit that sets at least three stage values between each of said averages value and a specified reference value; and

15 a histogram conversion unit that converts the histogram so that an average value of a histogram resulting from the conversion matches a stage value having a common order number among the plurality of the color components.

20 9. An image correction apparatus according to claim 7, wherein:

the average value corresponds to a barycentric value of the histogram.

25 10. An image correction apparatus according to claim 8,

wherein:

the average value corresponds to a barycentric value of the histogram.

- 5 11. An image correction apparatus according to claim 7, wherein:

said histogram conversion unit converts the histogram by using an interpolation function.

- 10 12. An image correction apparatus according to claim 8, wherein:

said histogram conversion unit converts the histograms by using an interpolation function.

- 15 13. A recording medium for recording a control program used in an image correction apparatus, said control program comprising:

an instruction for obtaining image data from outside constituted of a plurality of pixels each having a value
20 of a color component among a plurality of color components;

an instruction for calculating average values of color component values each corresponding to one of the color components using said image data; and

- 25 an instruction for correcting said color component

values of said pixels to match said average values of said color component values with a specific reference value.

14. A data signal embodied in a carrier wave comprising a control program used in an image correction apparatus, said control program comprising:

an instruction for obtaining image data from outside constituted of a plurality of pixels each having a value of a color component among a plurality of color components;

an instruction for calculating average values of color component values each corresponding to one of the color components using said image data; and

an instruction for correcting said color component values of said pixels to match said average values of said color component values with a specific reference value.

ABSTRACT OF THE DISCLOSURE

An image correction apparatus includes: an image obtaining unit that obtains image data from outside
5 constituted of a plurality of pixels each having a value in a color component among a plurality of color components; an average value calculation unit that calculates average values of color component values corresponding to individual color components in the image
10 data; and a correction unit that corrects the color component values of individual pixels to match the average values of the color component values corresponding to individual color components with at least one specific reference value.

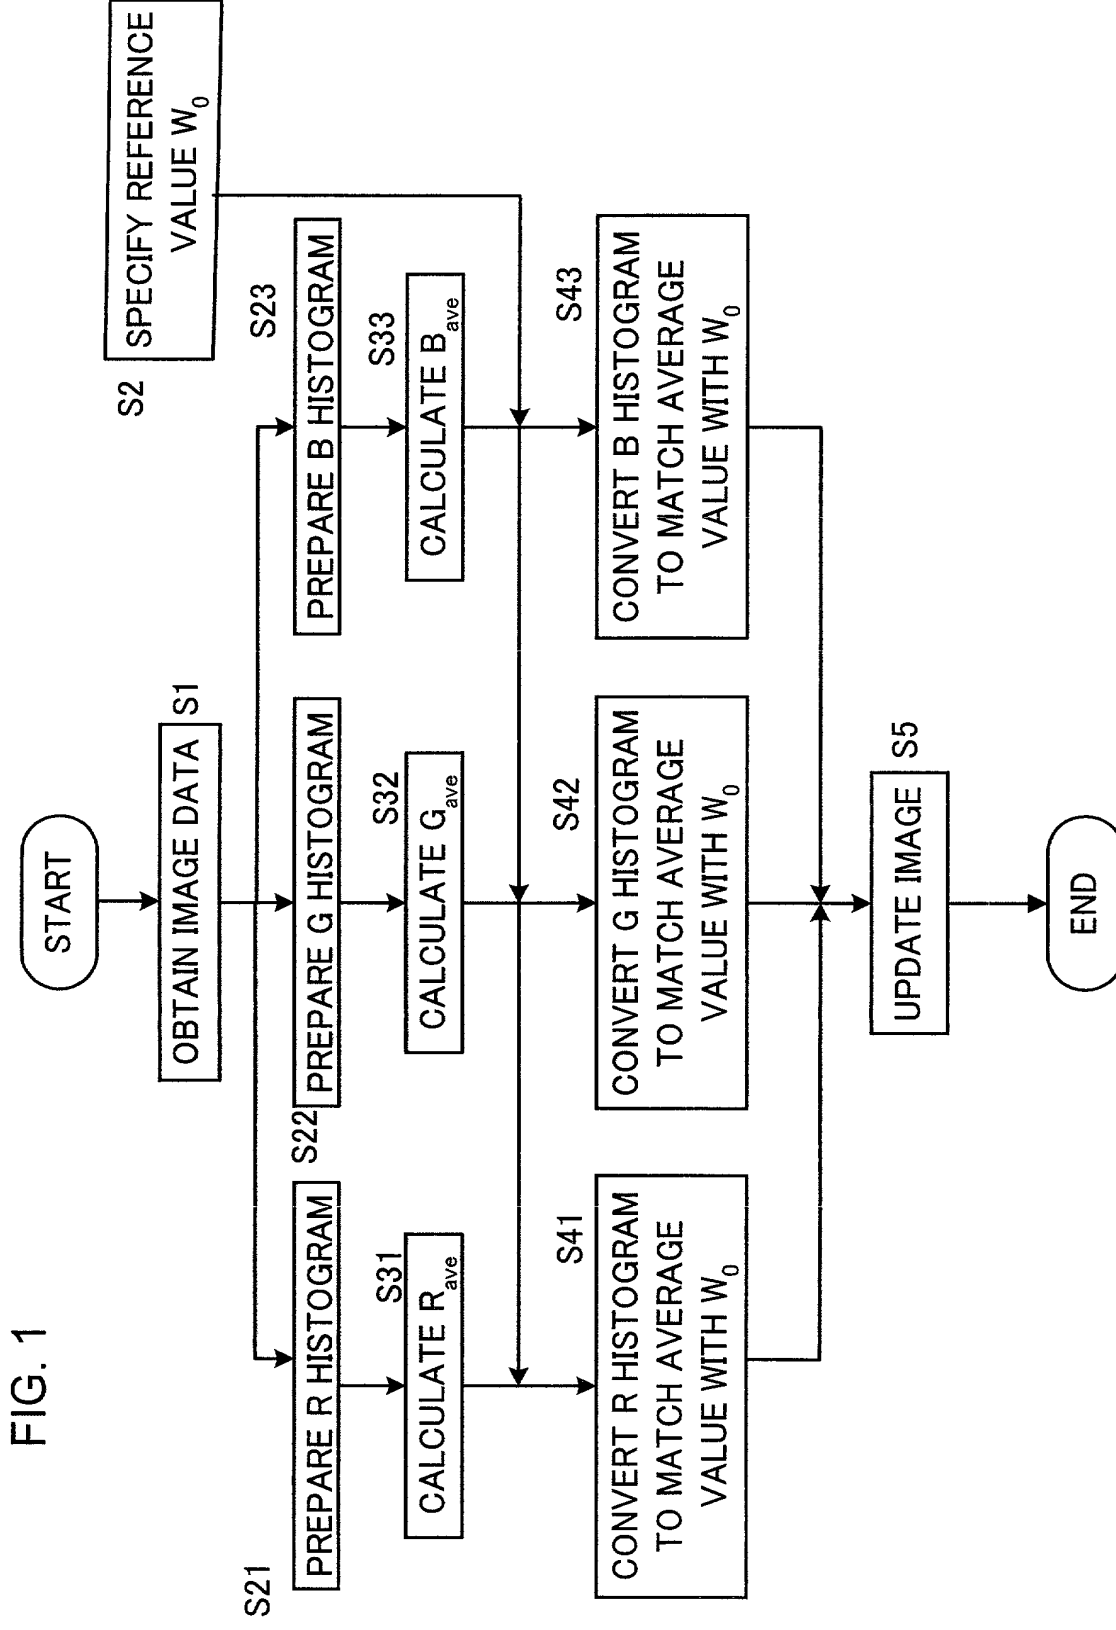


FIG. 2

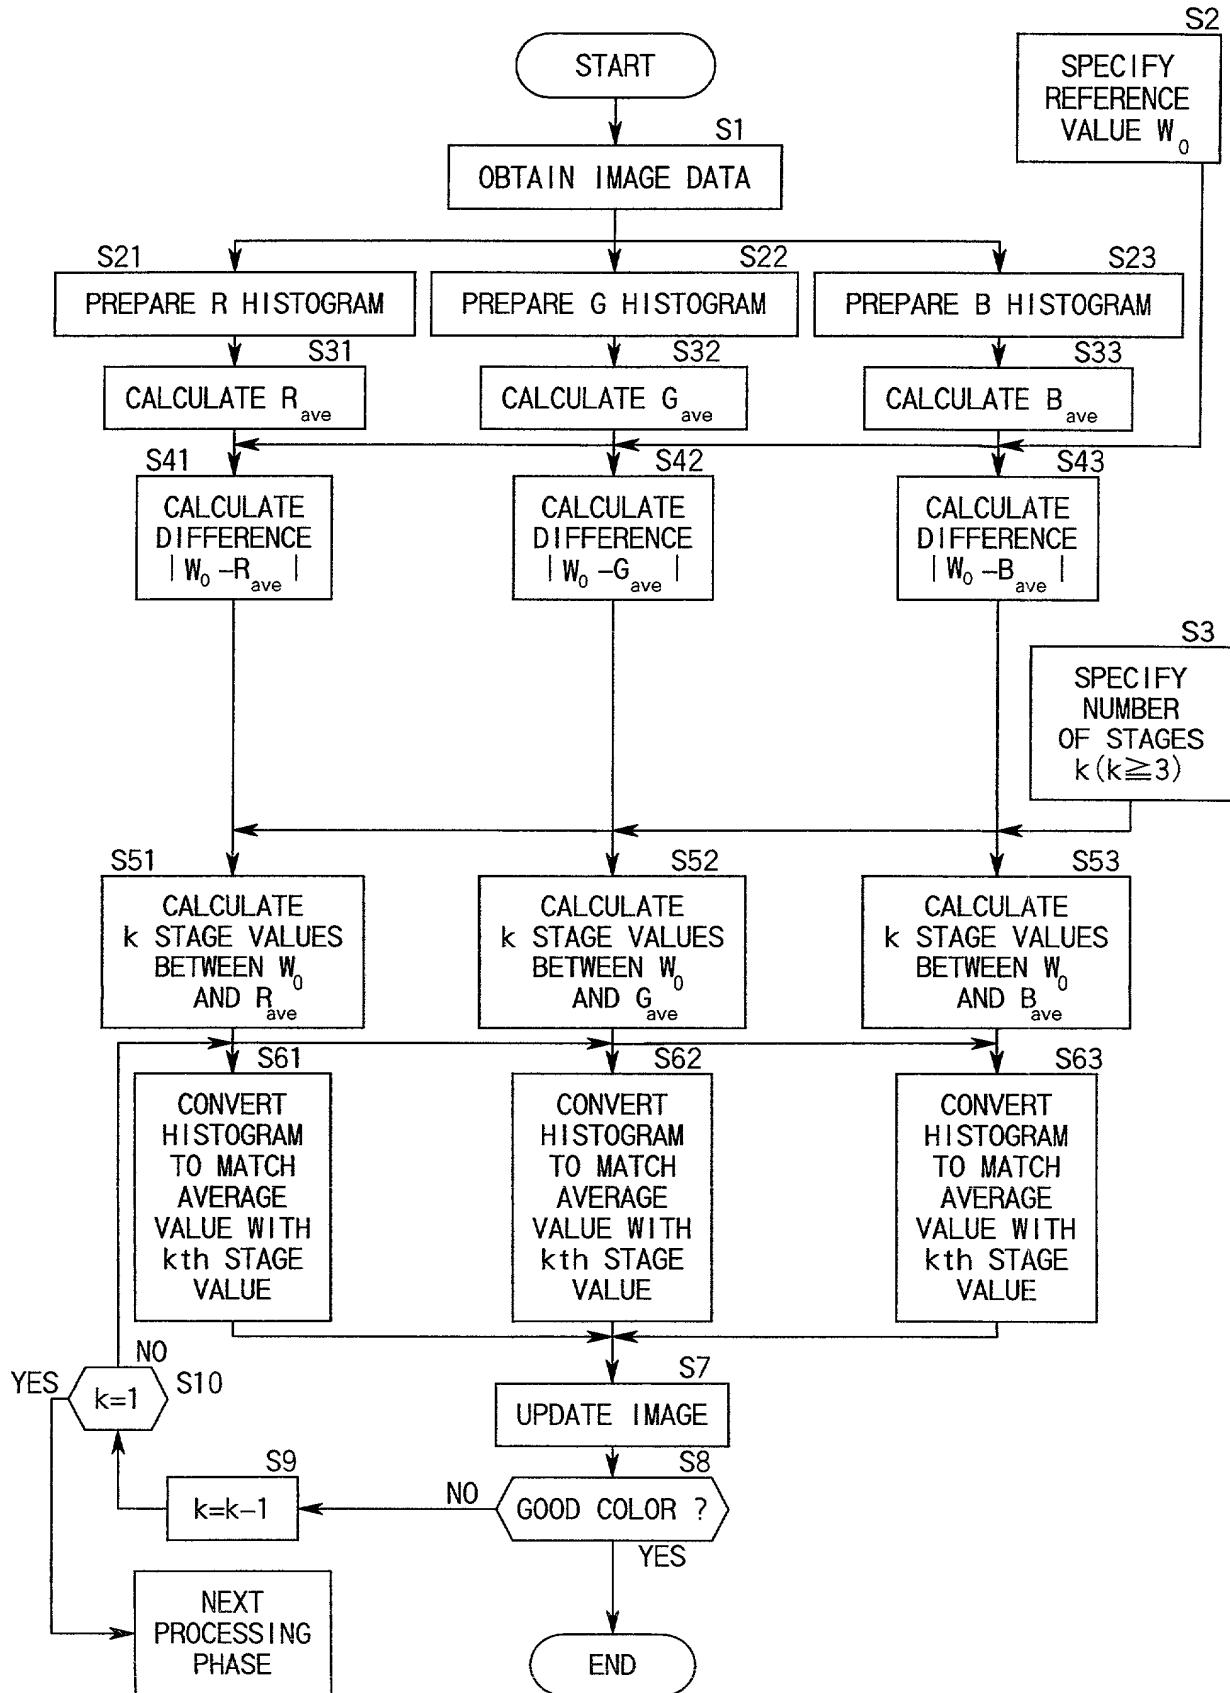


FIG. 3


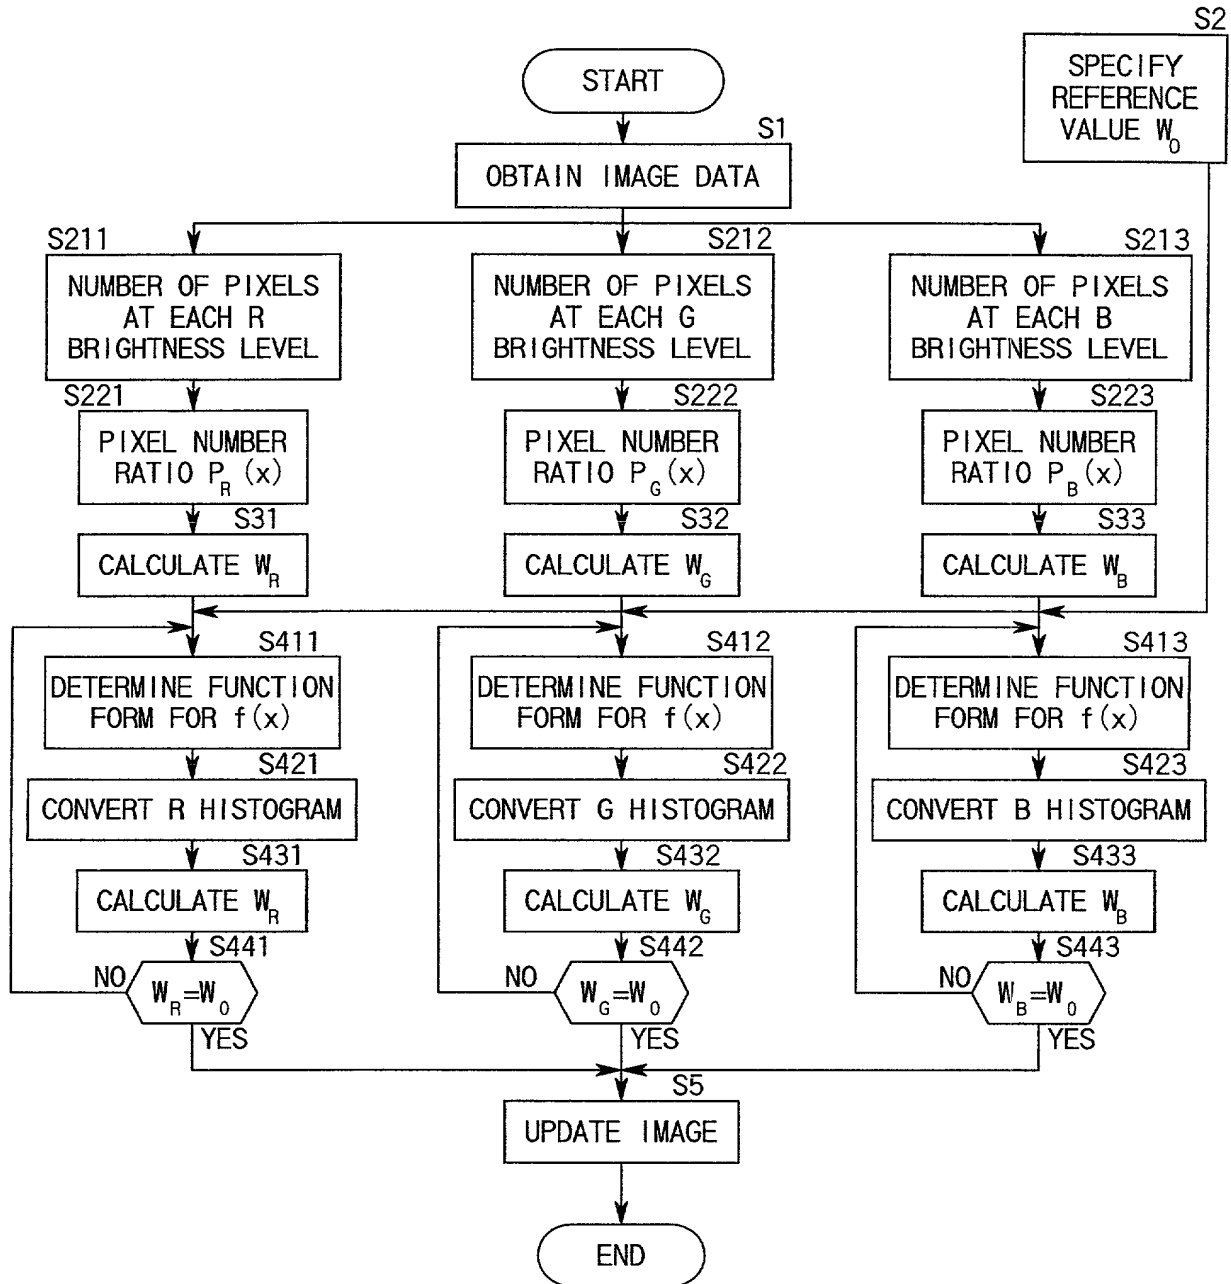


FIG. 5

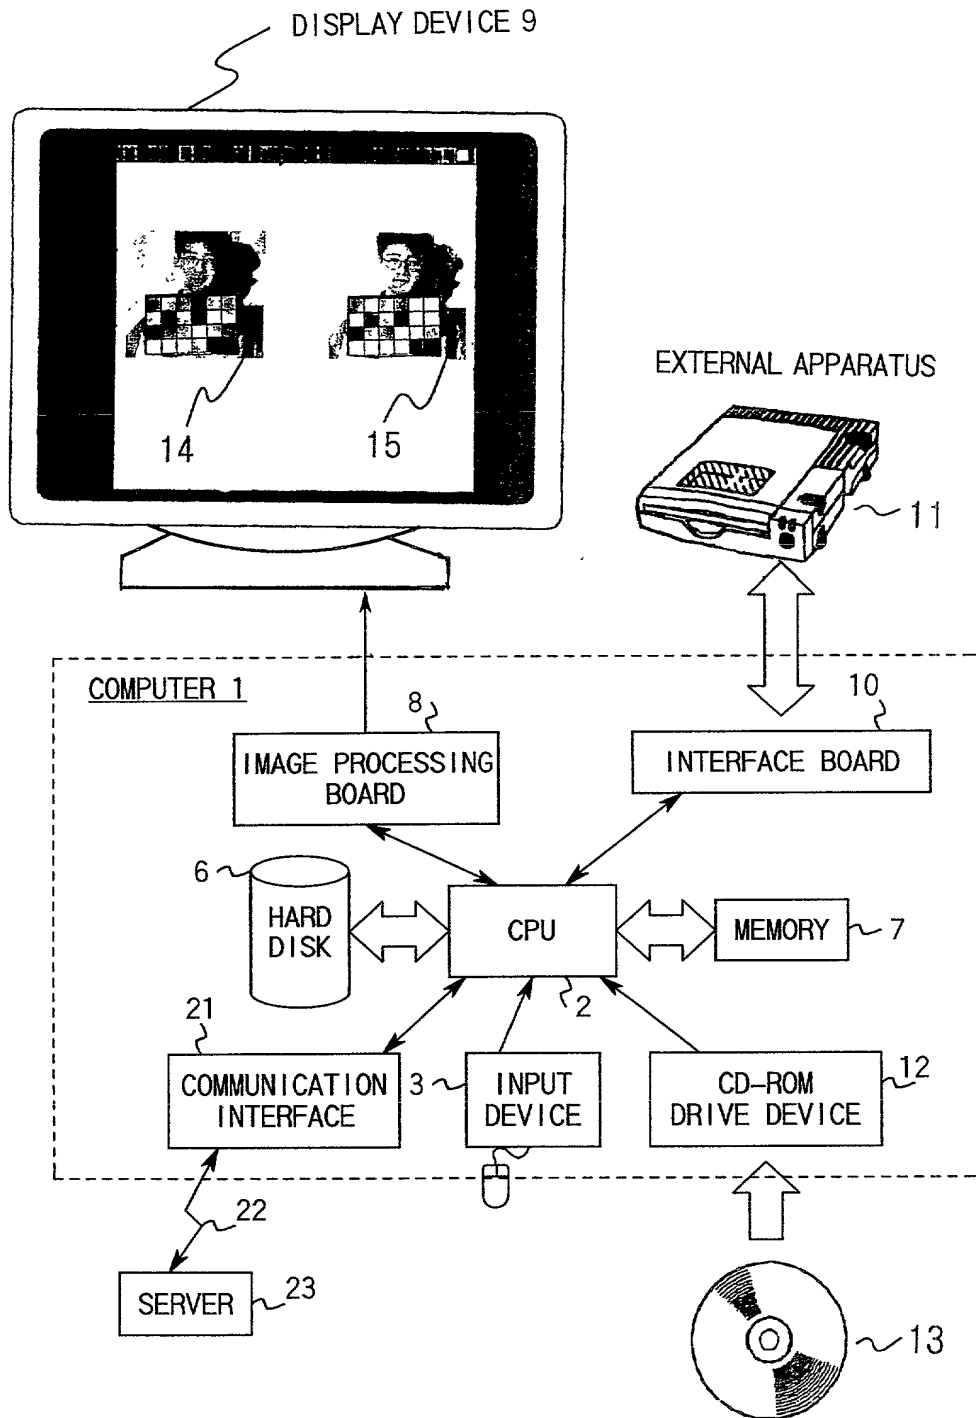

**APPLICATION FOR UNITED STATES PATENT
DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: IMAGE CORRECTION APPARATUS AND RECORDING MEDIUM HAVING IMAGE CORRECTION PROGRAM

described and claimed in the specification:

Check one

- * a. ☒ attached hereto.
b. ☐ filed on _____ as Application Serial No. _____

I hereby state that I have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) filed by me or my legal representatives or assigns within one year prior to this application are hereby claimed:
Japanese Patent Application No. 11-157165 filed June 3, 1999

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to said international application, or (b) before the filing date of the above-named foreign priority application(s) and/or United States provisional application(s):

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771;
Mario A. Costantino, Reg. No. 33,565; Caroline D. Dennison, Reg. No. 34,494;
and Stephen J. Roe, Reg. No. 34,463.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO OLIFF & BERRIDGE, PLC, P.O. BOX 19928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE (703) 836-6400.

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Typewritten Full Name of Sole or First Inventor	Juping		YANG
		Given Name	Middle Initial	Family Name
2	Inventor's Signature	Juping		Yang
3	Date of Signature	May	24	2000
		Month	Day	Year
	Residence:	Kawasaki-shi	Kanagawa-ken	Japan
		City	State or Province	Country
	Citizenship:	China		
	Post Office Address:	C/O NIKON CORPORATION, Fuji Bldg. 2-3, Marunouchi 3-chome,		
	(Insert complete mailing address, including country)	Chiyoda-ku, TOKYO 100-8331 JAPAN		

If Box a. is checked, this form may be executed only when attached to the specification (including claims).
Note to Inventor: Please sign name exactly as it appears above and insert the actual date of signing

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☒

